
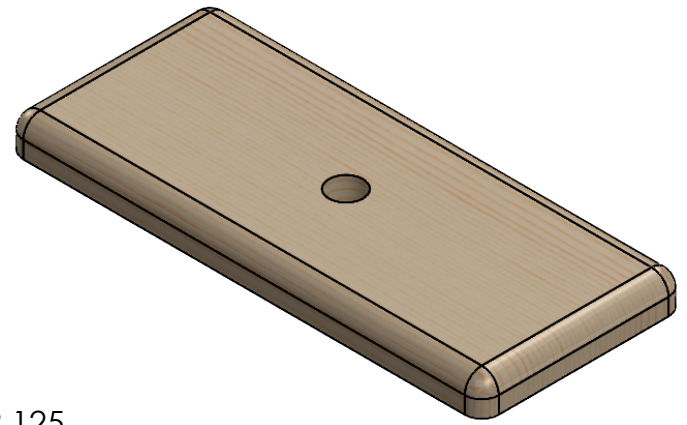


2



1

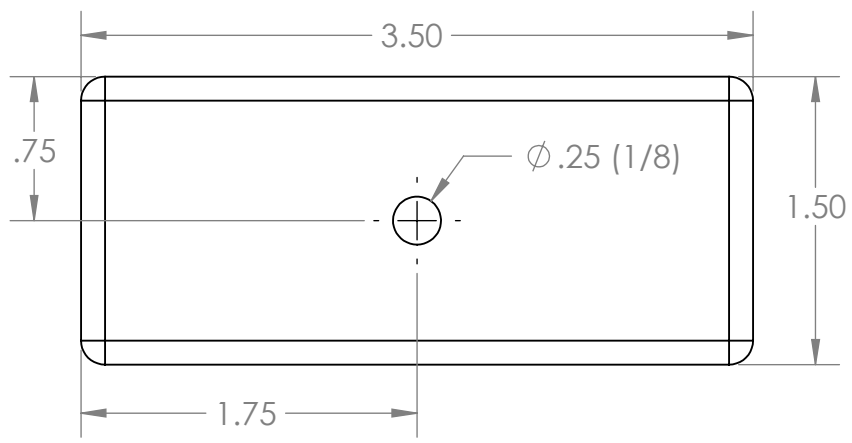

ALL FILLETS=R.125

INTENDED TO FIT PERFECTLY ON TOP OF MAIN BODY WITHOUT TOLERANCE ON EDGES

LID SHOULD ROTATE FREELY ABOUT A #10 SCREW PLACED THROUGH THE HOLE WITHOUT SLIDING

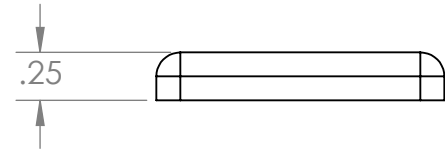

B

B

A

A

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES	DRAWN	OH	01/27/2026
		TOLERANCES: 0.0625"	CHECKED	LU	02/02/2026
		FRACTIONAL ± 1/16"	ENG APPR.		
		ANGULAR: MACH ± BEND ±	MFG APPR.		
		TWO PLACE DECIMAL ±	Q.A.		
		THREE PLACE DECIMAL ±	COMMENTS:		
		INTERPRET GEOMETRIC TOLERANCING PER:	#10 SCREWS USED		
		MATERIAL	PINE		
		FINISH	WOOD STAIN/FINISH		
	NEXT ASSY	USED ON			
	APPLICATION		DO NOT SCALE DRAWING		

OTIS HAINES		
TITLE:		
TIC TAC TOE LID		
SIZE	DWG. NO.	REV
A	A-102	4
SCALE: 1:1	WEIGHT: 0.02 LBS	SHEET 2 OF 2

2

1